



Specifications

Casing size, in [mm]	9 5/8 [244.5] and up
Max running speed in casing	No limit
Nozzle diameter, in [mm]	0.79 [20] x 12
Max pump rate, gal/min [l/min]	1,453 [5,500]
Min recommended pump rate, gal/min [l/min]	845 [3,200]
Max set down weight on magnet, lb [kg]	6,614 [3,000]
Max magnet lift capacity, lb [kg]	3086 [1400]
Max rotation speed, RPM	75
Max OD, in [mm]	8.30 [210.8]
Connection	NC50 Boxup
Temperature rating, °F [°C]	39 – 302 [4 – 150]

12 x 12 circulation ports in magnet nose sub

Archer

Tornar® Circulation Magnet Reliable Well Cleaning

The Tornar® Circulation Magnet retrieves magnetic objects and particle debris from the wellbore rapidly and reliably. Its unique design utilizes the most powerful magnetic elements, combined with thru-magnet Tornar® flow ports, for fishing and wellbore cleaning operations.

Magnetic debris is a serious oilfield challenge, and is responsible for many of the operational difficulties and costs of well production and maintenance, particularly in high deviations and hostile conditions. Even small objects can severely jeopardize well control and integrity, with potentially hazardous consequences to people, the environment and well components.

Applications

- Wellbore cleaning operations
- Retrieval of magnetic objects from the wellbore
- Run as integral part of drillpipe toolstring to attract and retain magnetic debris

Features

- Thru-magnet Tornar® flow ports
- One piece mandrel
- Stabilizer blades for support on low side
- Up to 75 rpm rotation
- Multi-magnet element
- Drill pipe connection

Benefits

- Thru magnet Tornar® flow ports clear particle debris to ensure full contact
- Up to 1000 kg lifting capacity
- No limitations in running speed
- No run in hole restrictions



+244 945 060 432
+244 922 916 323




sales@kaeso.co
operations@kaeso.co



We Prepare



We Send

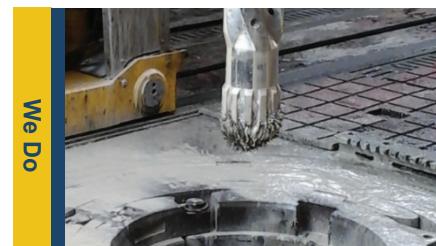

We Do